



DHS SERIES



DHS750-VORTEX

APPLICATION

- Submersible installation
- Stormwater transfer
- Waste / Greywater transfer
- Dewatering

FEATURES

- Stainless steel motor and pump shaft
- Vortex impeller
- Mechanical seal with back-up lip seal
- Soft solids handling up to 30mm
- 10m power cable
- Corrosion resistant body and base



CONSTRUCTION

- Pump body: Stainless steel AISI 304
- Motor shaft: Stainless steel AISI 304
- Impeller: Technopolymer
- Mechanical seal: Ceramic – Graphite
- Motor IP68
- Electric power cable HO5RN 10m with 3 pin



SUBMERSIBLE PUMPS

PERFORMANCE CURVE

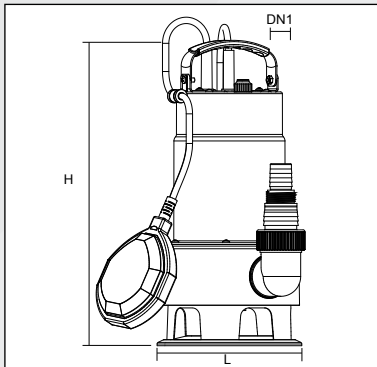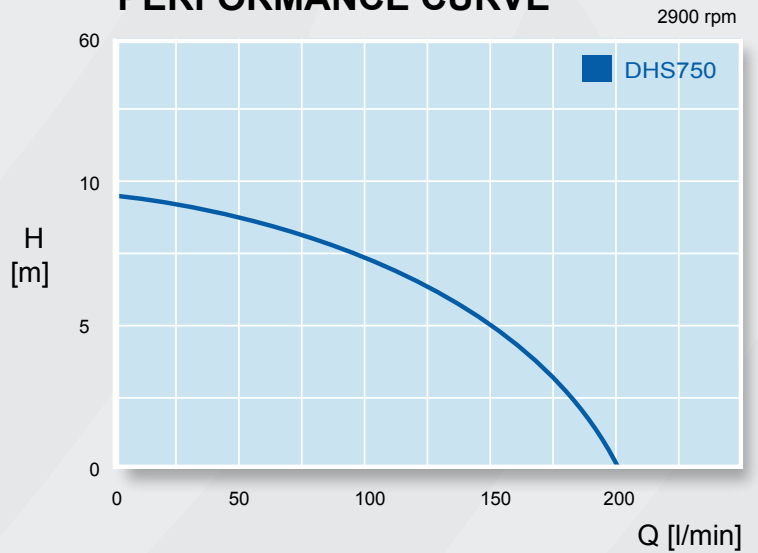

DIMENSIONS

Pump Model	Size (mm)		DN1	G.W
	H	L	(mm)	(KG)
DHS750	290	235	40F	6.9

TECHNICAL DATA

Pump Model	Power (P2) (kW)	Amps (A)	Max. FLOW (L/min)	Max. HEAD (m)	Cable (m)	Pump Style	Outlet	Solids Passage (mm)
DHS750	0.75	3.2	200	9	10	Vortex	1-1/2"	30